



LINO PLAF TIRA 52,5W 2500MM

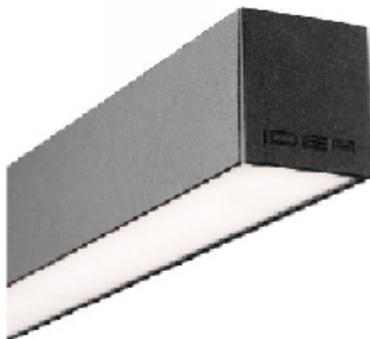

potencia	ángulo	color (K)	flujo	eficiencia	dim	driver	código
52.5W		2700K	7620lm	145 lm/W		EXTERNO	02.AA34.9220.03
52.5W		2700K	7620lm	145 lm/W		EXTERNO	02.AA34.9220.06
52.5W		3000K	7870lm	150 lm/W		EXTERNO	02.AA34.9230.03
52.5W		3000K	7870lm	150 lm/W		EXTERNO	02.AA34.9230.06
52.5W		4000K	7983lm	152 lm/W		EXTERNO	02.AA34.9240.03
52.5W		4000K	7983lm	152 lm/W		EXTERNO	02.AA34.9240.06

INFORMACIÓN TÉCNICA

CRI	
INDICE DE PROTECCIÓN	20
RESISTENCIA AL IMPACTO MECÁNICO	
CLASE	II
TENSIÓN	220-240

INFORMACIÓN GENERAL

USO	
SUPERFICIE	Techo
ILUMINACIÓN	Directa
MEDIDAS	31x2500x35mm
CUT OUT	
PESO (KG)	
REGULACIÓN	
COLOR	Blanco Texturado - Negro Texturado



LUMILEDS



CURVAS FOTOMÉTRICAS

